

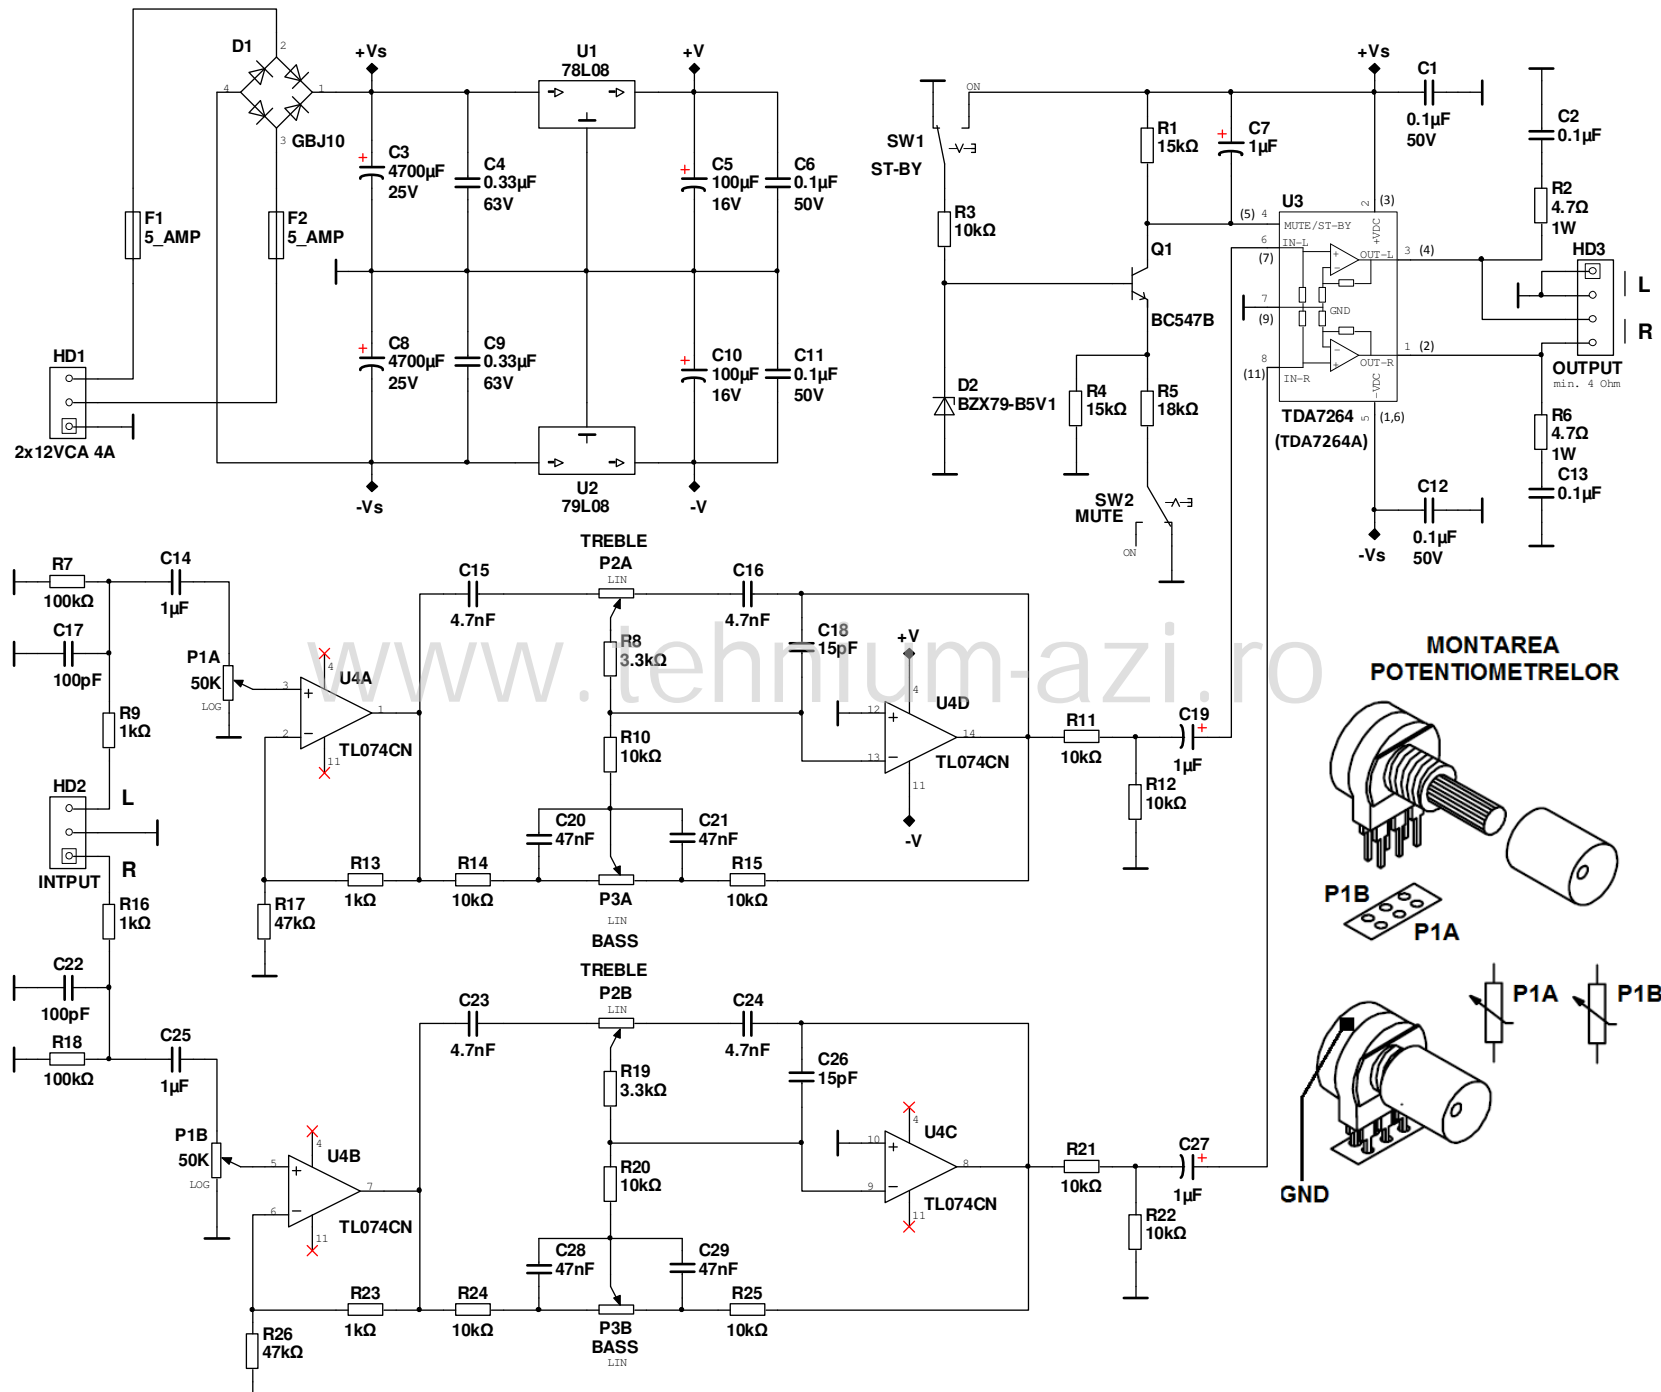


DP0109 AUDIO AMP WITH TDA7264 AND TONE CONTROL

www.tehnum-azi.ro
= donpetru design =

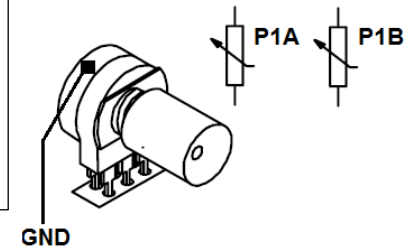

MONTAREA POTENTIOMETRELOR



DP0109

AUDIO AMP WITH TDA7264 AND TONE CONTROL
"donpetru" projects - www.tehnum-azi.ro

LISTA DE PIESE


Cantitate	Descriere	RefDes	Observatii
1	TDA7264	U3	
1	TL074	U4	Amplificator operational
1	BC547	Q1	
1	78L08	U1	stabilizator +8V
1	79L08	U2	stabilizator -8V
1	BZX79-B5V1	D2	Dioda Zener 5V1
2	4700 μ F - 25V	C3, C8	electrolitic
2	100 μ F - 16V	C5, C10	electrolitic
6	0.1 μ F	C1, C2, C6, C11, C12, C13	LCC capacitor *
1	1 μ F - 50V	C7	electrolitic polarizat
2	1 μ F	C19, C27	LCC capacitor *
2	1 μ F	C14, C25	LCC capacitor *
2	100pF - 100V	C17, C22	
2	0.33 μ F - 63V	C4, C9	
4	4.7nF - 63V	C15, C16, C23, C24	LCC capacitor *
4	47nF - 63V	C20, C21, C28, C29	LCC capacitor *
2	15pF	C18, C26	LCC sau ceramic
2	4.7 Ω - 1W	R2, R6	
11	10k Ω	R3, R10, R11, R12, R14, R15, R20, R21, R22, R24, R25	
2	15k Ω	R1, R4	
1	18k Ω	R5	
2	3.3k Ω	R8, R19	
2	47k Ω	R17, R26	
4	1k Ω	R9, R13, R16, R23	
2	100k Ω	R7, R18	
1	CONECTOR SEMNAL 3P	HD2	vezi pagina web
1	Bloc terminale 3 poli 10A	HD1	vezi pagina web
1	Bloc terminale 4 poli 10A	HD3	
1	GBJ10	D1	Punte redresoare 10A 100V
2	5 AMPERI	F1, F2	Terminale PCB & fuzibili 5A
3	Potentiometre 50K	P1, P2, P3	P1- logaritmic, P2, P3 - liniare
2	SWITCH	SW1, SW2	vezi pagina web


* Polyester Film Capacitor

** Rezistentele care nu au puterea specificata se pot alege de 0.25W



DIMENSIUNI PCB: 126 x 73 MM

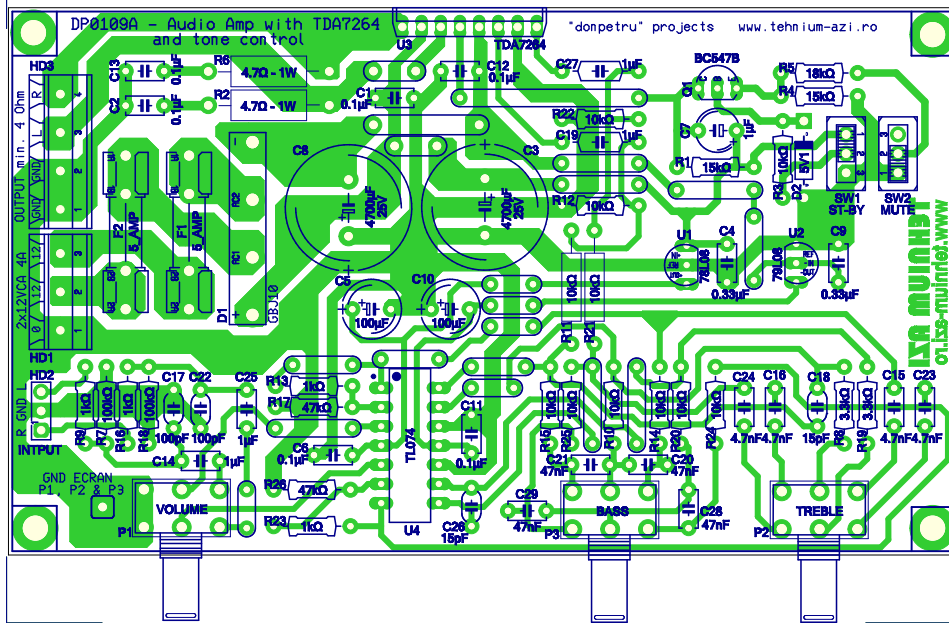

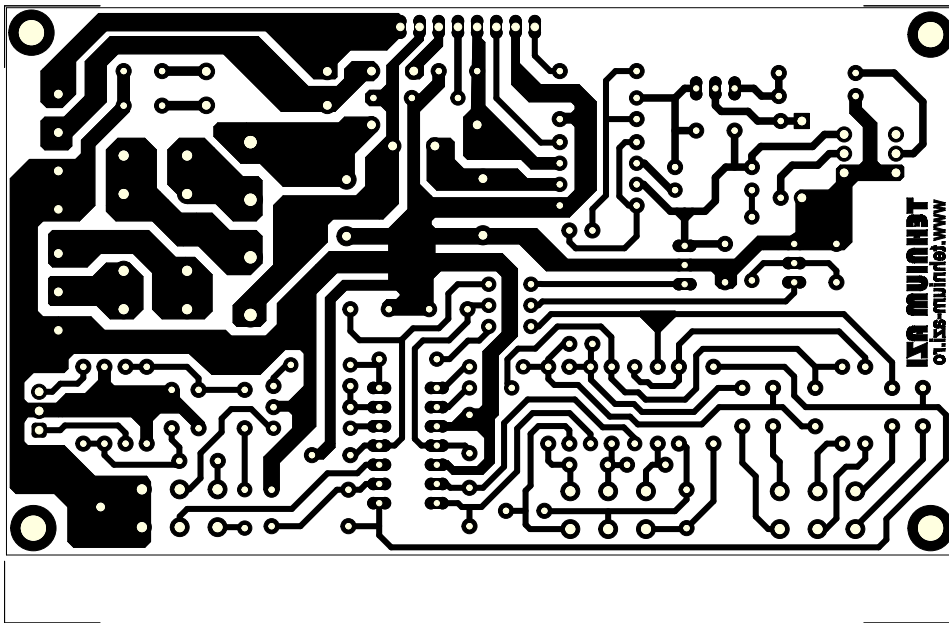



DIMENSIUNI PCB: 126 x 77 MM

